



ACT GREEN

www.pceups.com

Power Surge Protector

S9P508/S9P608 /S9P712

Protects PCs, Peripherals and other sensitive Electronic devices against Power Surges, Spikes and Lightning Strikes.

5 Standard Sockets S9P508/6 Standard Sockets S9P608

5 Standard sockets plus 2 "block space" Socket S9P712

16 Amp resettable Circuit Breaker

Heavy Duty Power Cord

Convenient Right Angle Plug

Unlighted Rocker Switch

EMI/RFI Noise Filter

Surge Protected Indicator


Power Ok Indicator

Full 3-Line Surge Protection 714 Joules

Phone/Fax/Modem Line Protection (RJ11/6P2C S9P508QT1- S9P608QT1 or RJ11/6P4C)*

Coaxial Line Protection (Aerial type)*

Internet line protection (combo)* S9P712

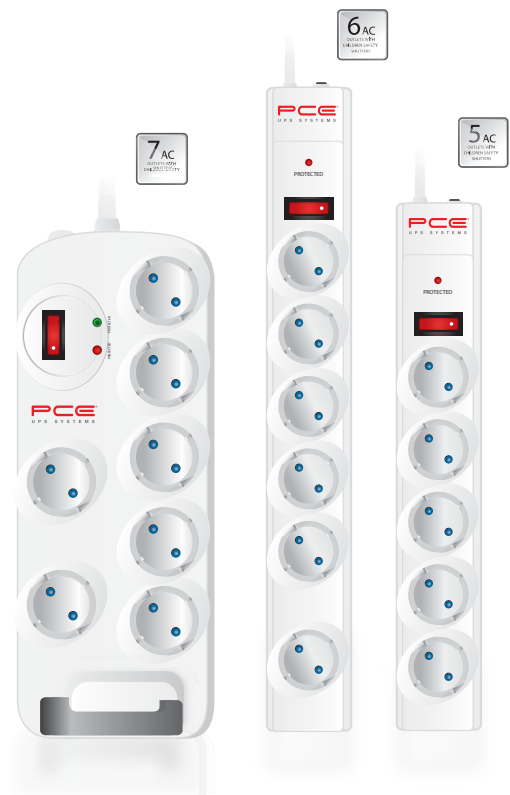

*Select models only

**YOUR ULTIMATE
POWER PROTECTION PARTNER**

PCE
UPS SYSTEMS

Product Overview

1. Duty Power Cord
2. Resettable Circuit Breaker
3. Rocker Power Switch Switch power On or Off
4. Surge Protected Indicator Orange light indicates your Surge Protection is working properly
5. Power OK Indicator
Green light indicates your electrical wiring is properly connected
6. Multiple Stage Metal Oxide Varistor (MOV) (Optional) Absorb surges. Provide common and normal mode protection from high energy Spikes
7. Safety Shutdown Technology
Uses thermal fuses to power off your system, which protects against fire and other damage in the event of an extreme, extended over voltage or when surge protection expires
8. 6 AC S9P608/7AC S9P712 Outlets with Children Safety Shutters help to protect users and their children; keep dust and debris from unused Outlets
9. High-Frequency Capacitor
Remove noise interference

Technical Specifications

1. **Rated Current** : 16 Amps
2. **Rated Voltage** : 250 VAC, 50-60Hz
3. **Clamping Voltage** : 775V
4. **Max. Energy** : Full 3 - Line Surge protection
H - N, H - G, N - G: 714 Joules
5. **Max. Current** : Full Type: 19500A
6. **Max Spike Voltage** : 6kV
7. **Response Time** : < 1 Nanosecond
8. **EMI/RFI Noise Filter:**
Frequency Range : 150 KHz ~ 100 MHz
Attenuation: : Up to 40 dB
9. **Tel / Fax / Modem Protection***
Jack Type : RJ11
Energy : 160 (6P2C) S9P508QT1
/320 (6P4C) Joules
10. **Coaxial Line Protection***
Surge Arrestor : Gas Tube
Breakdown Volts : < 75V
Insertion Loss : 0.1 dB
11. **Network Protection* S9P712**
RJ45 (1-In/1-Out,8P8C) Combo with
RJ11 jack Cat.5,10 Base-T
* Select Models Only



S9P 508 - S9P 608
S9P 508 P - S9P 608 P
S9P 508Q - S9P 608Q



S9P 508 QT1 - S9P 608 QT1



S9P 508 QT5 - S9P 608 QT5



S9P 508 QD6 - S9P 608 QD6